

STD MFG STICKER



ONE INCH HIGH  
RED LETTER STENCIL  
OR VINYL LABEL — FDNYC C of A 4979



STD AREO STICKER

THIS TO BE ADDED TO BOTH SIDES OF TANK

MBA# 4979

CAPACITY - 300 GALLONS

MATERIAL - MILD CARBON STEEL

THICKNESS - INNER SHELL - 7 GA MIN  
OUTER SHELL - 7 GA MIN.

HEADS - INNER - 7 GA MIN. STD FLG'D & DISHED  
OUTER - 7 GA MIN. STD FLG'D & DISHED

CONSTRUCTION - INNER & OUTER - LAP  
WELD OUTSIDE ONLY


TEST - INNER - 20 PSIG HYDROTEST  
OUTER - 5 PSIG AIR

PAINT - INT - NONE

EXT - SSPC SP6 BLAST, EPOXY  
PAINT SYSTEM, COLOR TO BE  
WHITE

LABEL - UL 2085, FIREGUARD, NYC FD, AND  
NEW YORK 614


6" LIGHTWEIGHT  
INSULATION MATERIAL  
WITHIN INTERSTICE

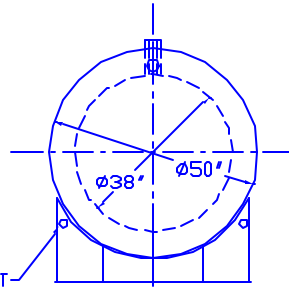

2" HOLE FOR SHIPMENT  
BANDING (2) TYP PER  
SADDLE

(2) 50" ø x 6" HIGH SADDLES  
STJ SPECIFICATION  
SEAL WELD TO TANK

89" APPROXIMATE HEAD TO HEAD

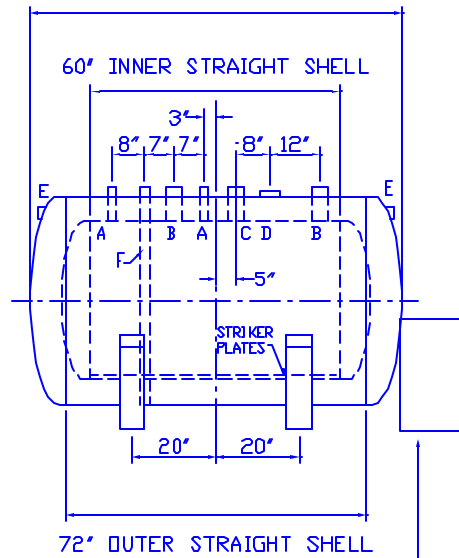

GROUND LEVEL FILL BOX

NOTE:  
ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST  
NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION  
OF AREO-POWER UNITIZED FUELER INC  
AREO-POWER SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED  
ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER  
IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE / LOCATION  
OF FITTINGS, ACCESSORIES & COATINGS SHOWN ON THIS DRAWING

- A 2" FEMALE FG COUPLING
- B 4" FEMALE FG COUPLING
- C 4" FEMALE FG COUPLING - FOR PRIMARY EMERGENCY VENT USE
- D 4" FITTING THROUGH OUTER SHELL ONLY - INTERSTICE EMERGENCY VENT
- E 2" FITTING THROUGH OUTER SHELL ONLY W/ CAST IRON PLUG - FOR MFG PURPOSES ONLY
- F 2" INTERNAL MONITOR INTERSTICE MONITOR PIPE WITH MALE NPT AT TOP

<b>AREO-POWER</b> <sup>®</sup>				
300 GALLON 38" ø FIREGUARD <sup>®</sup>				
NEW YORK CITY STYLE				
CUSTOMER: ---				
PROJECT: ---				
QUOTE NO: ---				
SCALE 3/8" = 1'-0"	DATE 09/13/02	DRAW BY 001	CHK'D BY	DWG NO 300FGNYCFD