


NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF AREO POWER. AREO POWER SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE AND LOCATION OF FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING.

## GENERAL SPECIFICATIONS

NO. REQ'D: 1  
 MODEL: 25 FIELD REVERSIBLE  
 MATERIAL: 304 STAINLESS STEEL 2-B FINISH  
 GAUGE OR THICKNESS OF MATERIAL 14 ga. THROUGHOUT  
 APPROX. WEIGHT: 137 lbs.  
 STATIC WATER CAPACITY: 17.1 gal  
 GREASE HOLDING CAPACITY: 90.5 lbs.  
 RETENTION TIME: 40.4 SEC.  
 APPROVED LABELS : UL 1D42

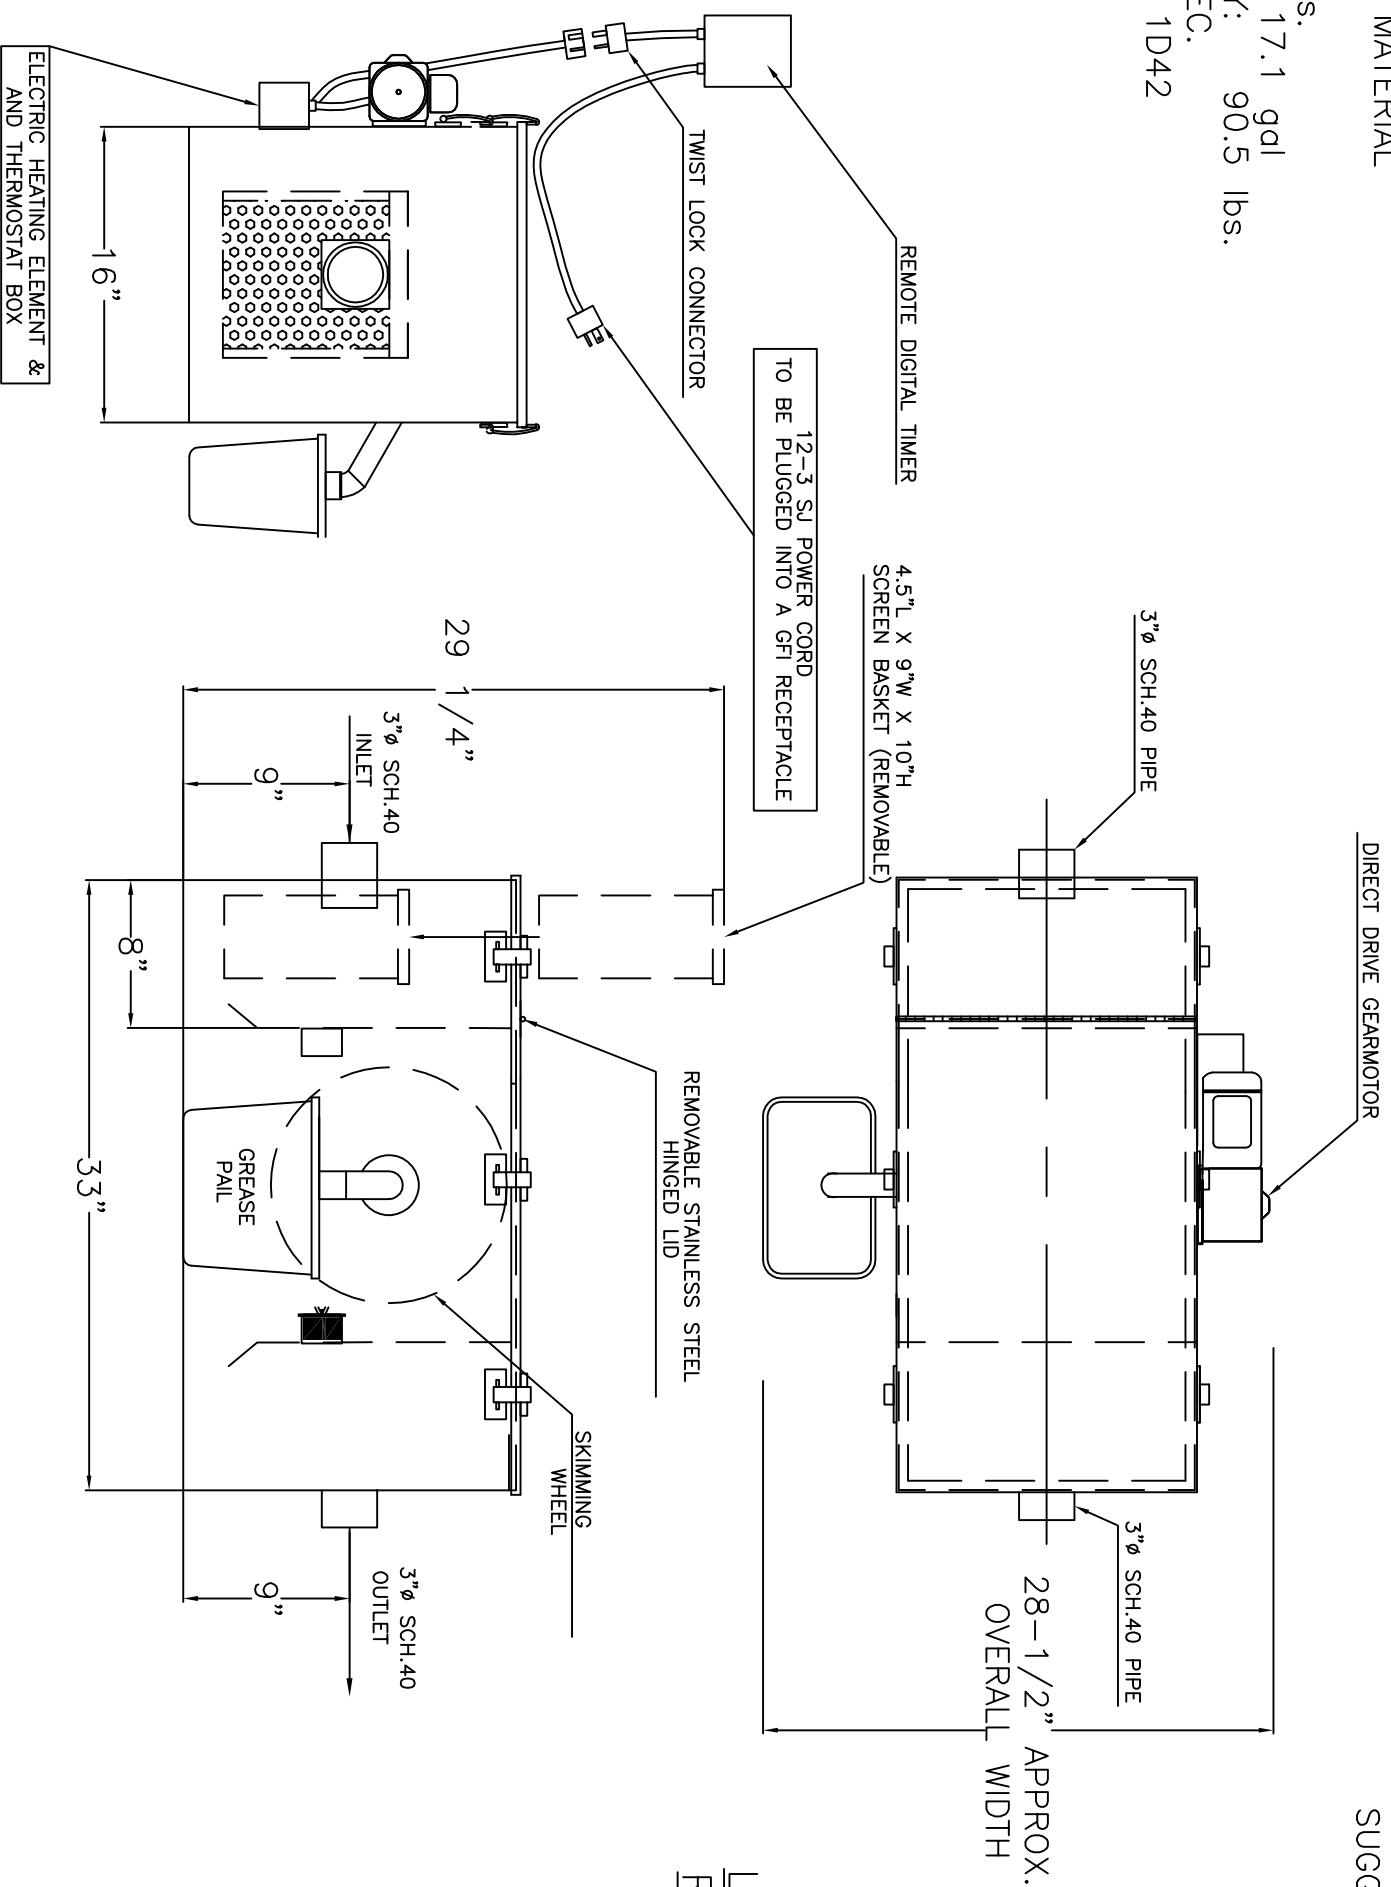

## ELECTRICAL INFORMATION

UNIT MUST BE PLUGGED INTO A GFI(GROUND FAULT INTERRUPT)RECEPTACLE.  
 GEARMOTOR— .933 FLA, 115V, 60hz  
 ELECTRIC HEATING ELEMENT— 115 V, 1500 W

NOTE:  
 THE A.G.I. IS NOT A TRAP FOR SEWER GAS WE SUGGEST A TRAP DOWN STREAM FROM THE A.G.I.

LEFT TO RIGHT OR  
 RIGHT TO LEFT AS  
 NEEDED

REVISIONS	

GREASE STOPPER MODEL25  
 FIELD REVERSIBLE

CUSTOMER:

PROJECT:

QUOTE NO:

SCALE: 1"=1' DATE: 12/17/09 DVG. BY: CLO CHK'D BY: DVG. NO.: AREOPOWER25 FR