

DRAWING TITLE

NEW YORK CITY
20,000 GAL U/G
TYPE 1 DW


NOTE :
ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK.
HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE / LOCATION OF FITTINGS , ACCESSORIES & COATINGS SHOWN ON THIS DRAWING

FITTING SCHEDULE

- A= 6" ϕ NPT WITH 6" x 4" NYLON BUSHING
- B= 3" ϕ NPT WITH 3" x 2" NYLON BUSHING
(FITTING FOR LEAK DETECTION W/ INTERNAL PIPE)

GENERAL NOTES

- CAPACITY : 20000 GALLONS
- TYPE : 1 360 DOUBLE WALL, UNDERGROUND, NY CITY
- NO. REQ. :
- MATERIAL : MILD CARBON STEEL
- TEST : 30 P.S.I. INNER 5 P.S.I. OUTER
- MIN. GAUGE OR THICKNESS (PER U.L. 58) :
- (BASED ON 60" MAX. BURIAL DEPTH)
- INNER HEADS : 3/8" OUTER HEADS : 1/4"
- INNER SHELL : 3/8" OUTER SHELL : 7 GA.
- PAINT :
- INTERIOR : NONE
- EXTERIOR : SP-6 BLAST, COAT WITH :
 - CORRODOTE PLUS 10 MILS
 - POLYURETHANE 70 MILS
 - FIBERGLASS REINFORCED POLYESTER 125 MILS
- CONSTRUCTION : FLANGED & DISHED HEADS, LAP WELD
ALL EXTERIOR SEAMS ONLY
- APPROVED LABELS : U.L. 58, NYC, NYDRR PART 614
 - S.T.J.P.3
 - ACT-100-U
 - ACT-100
- 15000 VOLT SPARK TEST PROVIDED AT FACTORY FOR POLYURETHANE MODELS
- 35000 VOLT SPARK TEST PROVIDED AT FACTORY FOR F.R.P. MODELS

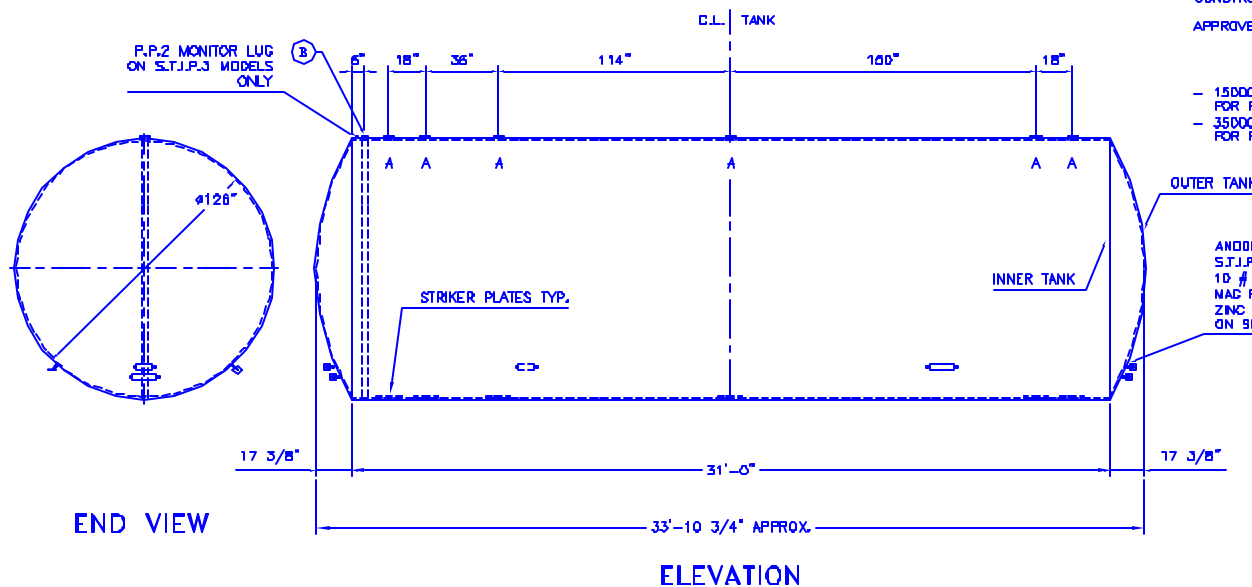

REV	DATE	BY	REVISION DESCRIPTION

ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION OF AREO-POWER UNITIZED FUELER, INC.

DWC HQOK DWINYCUG12B
SCALE: 3/16"=1" DWN BY: HT
SHEET: 1 DATE: 11/1/02